HABCO® H49LTM MEDIA DIMENSIONS

HABCO® provides dimensional information as a guideline only and does not warrant any media production based on specifications provided. **NOTE: ALLOW 0.5" ADDITIONAL BLEED FOR ALL LAYOUTS, ON ALL SIDES, FOR TRIM POSITIONING.**

SIDE DECAL H49LTM - Recommended Substrate Thickness: 0.004"

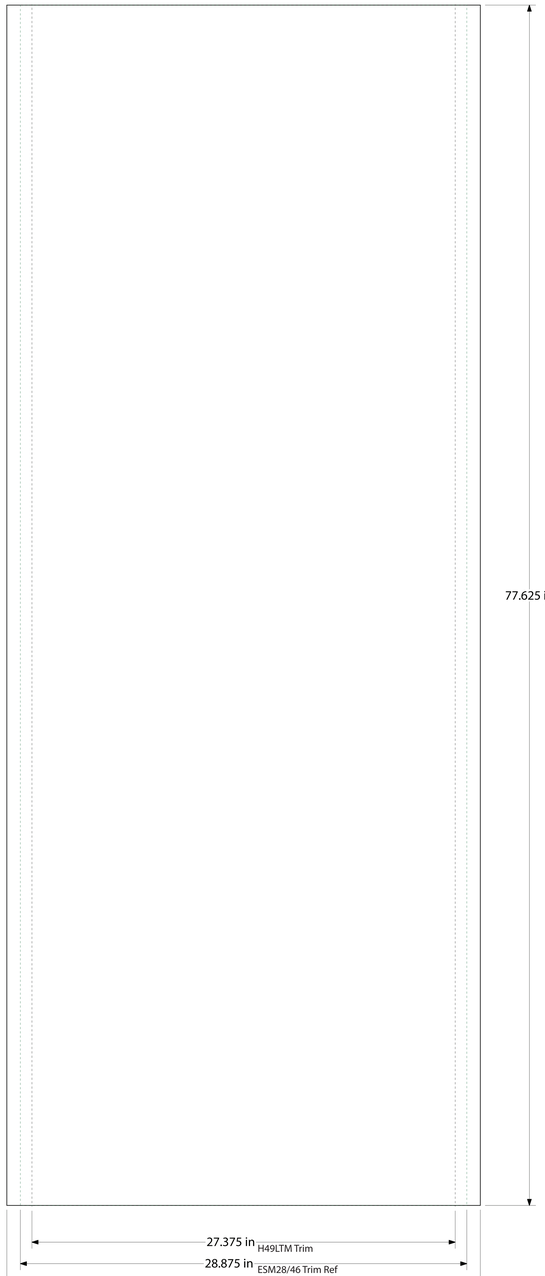

HEADER BACKLIT FASCIA FRONT H49LTM Common Artwork and Finished Size - Recommended Substrate Thickness: 0.110"

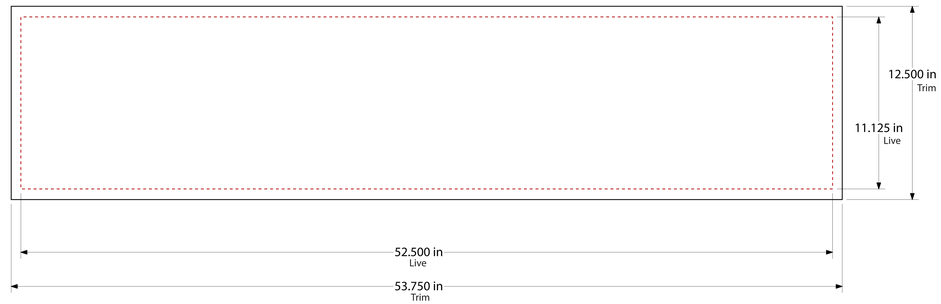

HEADER DECAL REAR H49LTM Common Artwork and Finished Size - Recommended Substrate Thickness: 0.004"

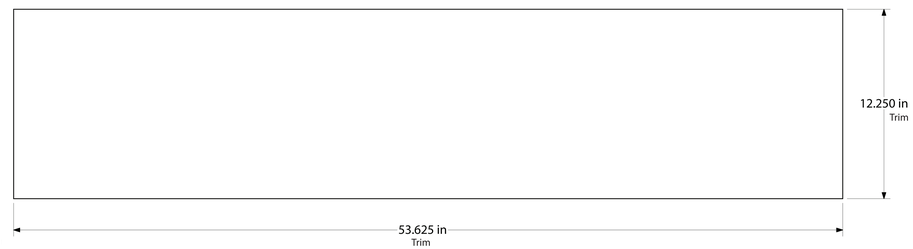

HEADER SUBSTRATE THICKNESS: Recommended minimum 0.110", Thick Clear Polycarbonite including ink or digital decal.

Header Backlit Fascia Process: Screenprint facedown with transluscent white diffusion layer flood; Digital print facedown clear decal with transluscent white diffusion layer backing or flood.

Header Decal Side and Rear Process: Screenprint face up on opaque white pressure sensitive decal; Digital print face up opaque white pressure sensitive decal.

UNIVERSAL SIDE DECAL ARTWORK FORMAT COMMON TO ESM28/42/46: Use H49LTM Trim Dimensions as Live Area and Bleed to ESM42 Trim Dimensions. ***If not using model ESM28/42/46 ignore this note and reference.***

OPTIONAL FULL REAR SOLID DOOR(S) MERCHANDISING - Separate Door Graphic Designs will incur additional charges

DOOR DECAL FULL LEFT HAND H49LTM- Recommended Substrate Thickness: 0.004" DOOR DECAL FULL RIGHT HAND

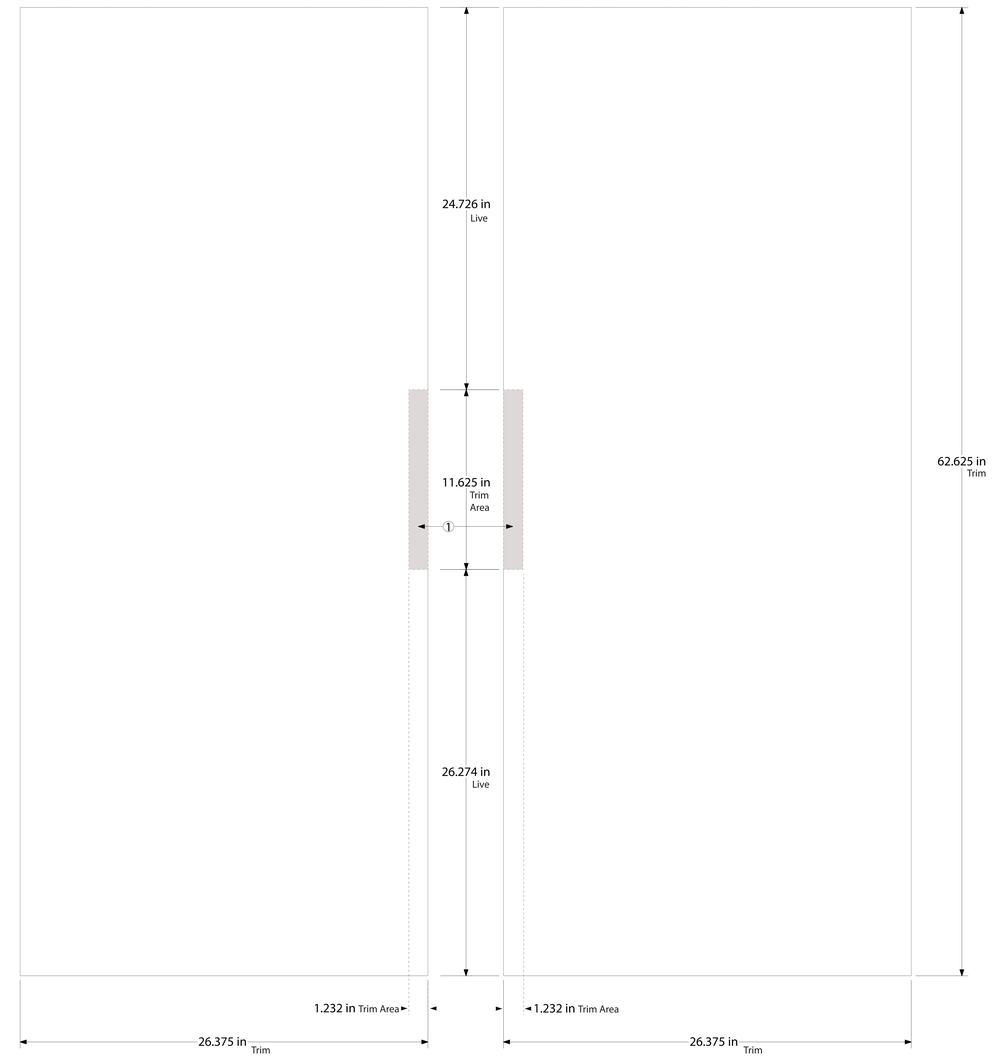

1 TRIM AREA FOR REAR SOLID DOOR RECESSED HANDLES AND DOOR LOCK. NOTE: LIVE GRAPHIC SHOULD REMAIN OUTSIDE THIS AREA TO AVOID UNWANTED TRIMMING OF LIVE GRAPHIC DESIGN ELEMENTS - USE BLEED ONLY FOR THIS AREA.

Issued HABCO® Toronto: June 19, 2017