

HABCO®

BUILT TO PERFORM. CRAFTED TO LAST.®

SE28HCRxGV

Pharmaceutical /
Laboratory Refrigerator
NSF/ANSI-456 Certified



Specifications

Width*	Depth**	Height***	Shelves	Interior Cubic Volume	Ship Weight	Ship Cube	Cooling Capacity	Electrical
30 1/2" 775 mm	31" 788 mm	78" 1982 mm	7	24.75 ft ³	350 lbs 159 kg	49 cu. ft 1.39 m ³	1/2 HP	115V/5.3 Amp/60 Hz - Single Phase - NEMA 5-15P, Dedicated Circuit

** Add 1" (26mm) for Power Cord. *** Add 3/8" (10mm) for Threaded-In Levelers. Millimeters rounded up.

Premium Features



Automatic Stainless Steel
Condensate Control System




Cassette®
Refrigeration



Free & Clear
Condenser Coil



HABCO
Insulated Glass



LED



ProductTemp™



Variable speed



Digitally Controlled



Front Breathing
Refrigeration



Priority Air-Flow

PHARMACEUTICAL / LABORATORY REFRIGRATOR

Specifications subject to change without notice. Refer to website for most current information.

SE28HCRxGV: Designed to enhance pharmaceutical storage and display experience to the highest standards of quality and performance.

Refrigeration:

- Self contained Cassette® forced-air refrigeration employs R290 hydrocarbon Natural Refrigerant within a sealed capillary tube system. Cassette® refrigeration is bottom-mounted and removable from the front for ease of maintenance. Refrigeration may be exchanged or upgraded without mechanic. Designed to comply with NSF-456 temperature range requirement 35.6°F to 46.4°F (2°C to 8°C).
- Equipped with Energy Efficient Digital Controller featuring visual/audible product protection alarm.
- Built-in NIST calibrated and NSF-456 compliant digital data logger. Data logger provides audio & visual notification as per NSF-456 requirement.
- Priority, directed air flow provides optimum cooling and energy efficiency within cabinet and exclusively at front of unit for optimized heat exchange ventilation.
- Finless, Free&Clear™ Condenser Coil maximizes air-flow over the compressor, reduces energy consumption and is non-clogging.
- Automatic, stainless steel condensate control system.
- Technologically advanced ProducTemp™ provides exterior product temperature display. Displays to a resolution of 0.1°.
- Quality, self-lubricating and sealed motors with streamlined air-flow provide quieter yet robust refrigeration.
- Variable speed compressor for extended operational life, improved energy efficiency and increased pull down time on demand to keep tight temperature fluctuations.



Cabinet:

- Exterior – durable appliance white.
- Interior – NSF approved white aluminum liner with stainless steel floor.
- Equipped with a Probe Port, which allows for the insertion of a Third-Party Temperature Probe.
- Ergonomic raised interior floor.
- Space Saving Design – air ventilation exclusively from the front of unit
- Insulation – cabinet is foamed-in-place with eco-conscious, polyurethane insulation.
- Heavy duty thread-in leveler legs.

Doors:

- Self Closing Swing Doors feature hold-open position, spring back protection and are reversible on-location.
- Door Lock is standard.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Heat Reflecting HABCO Insulated Safety Glass with black extruded frame.
- Integrated, injection molded pocket handle(s).

Lighting:


- Energy Efficient LED Lighting System for sparkling Illuminated Interior Display, on Switch.

Storage:

- Seven (7) PU coated white shelves 26 1/4"W x 22"D (667mm x 559mm), are NSF approved.
- Heavy duty aluminum pilasters that will not peel or chip. Pilasters allow shelves adjustment of 1/2" (13 mm) increments.

Electrical:

- Factory power cord installed for connection to a sole-use (dedicated) 115V/60Hz/1-Phase, 15 Amp circuit.

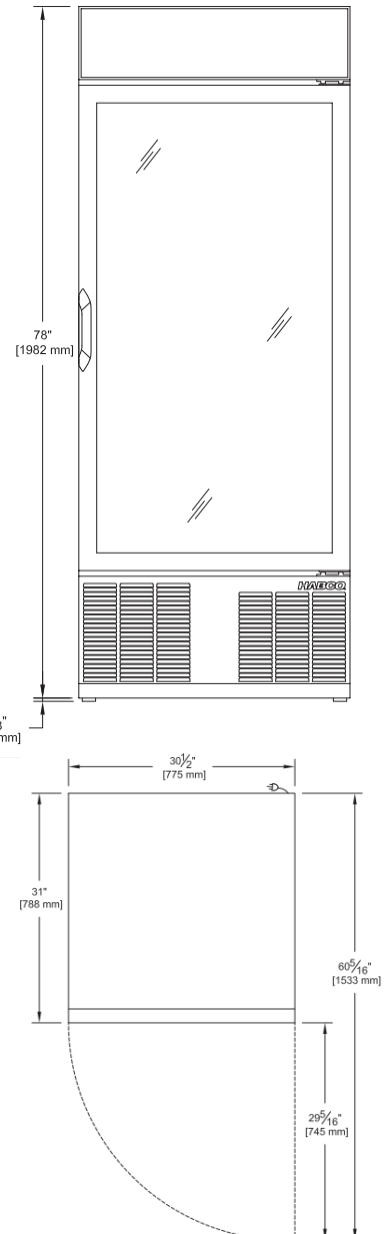

HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6
Toll Free CAN:1-800-387-5398 USA:1-800-448-0244 Fax:416-491-6982 www.habcomfg.com