



BUILT TO PERFORM. CRAFTED TO LAST.®

H46HCP

Cold Space Merchandiser™



Specifications

| Width* | Depth** | Height*** | Shelves | Interior Cubic Volume | Ship Weight | Ship Cube | Cooling Capacity | Electrical |
|------------------------------|---------------|----------------|---------|---------------------------------------|-------------------|---------------------|------------------|---|
| 47.5" 1207 mm | 31" 788 mm | 78" 1982 mm | 10 | 38.6 ft³ | 500 lbs 227 kg | 80 cu.ft 2.28 m3 | 1/4 HP | 115V/4.3A/60Hz - Single Phase - Install in Accordance to NFPA 70 and NFPA 30A |
| Flat Shelf Volume 20oz/600ml | | | | Gravity GlideSet™ Volume 20 oz /600ml | | | | Trailerload Quantity (53') |
| 490 (Packout) | | 14 (Facings) | | 490 (Packout) | | 14 (Facings) | | 36 |

** Add 1" (26mm) for Power Cord. *** Add 3/8" (10mm) for Threaded-In Levelers. Millimeters rounded up.

Premium Features



Automatic Stainless Steel
Condensate Control System



Cassette®
Refrigeration



Free & Clear
Condenser Coil



HABCO
Insulated Glass



Priority AirFlow



LED



Digitally Controlled

COLD SPACE MERCHANDISER

Specifications subject to change without notice. Refer to website for most current information.

H46HCP: Designed to enhance outdoor refrigerated merchandising and display at Motor Fuel Installations, in accordance to NFPA 70 and NFPA 30A regulations.

Refrigeration:

- Self contained Cassette® forced-air refrigeration employs R-290 refrigerant within a sealed capillary tube system.
- Cassette® refrigeration is top-mounted and removable from the front for ease of maintenance. Refrigeration may be exchanged or upgraded without mechanic. Designed to hold 33°F to 38°F (0.5°C to 3.3°C) in higher ambient outdoor conditions.
- Priority, directed air flow provides optimum cooling and energy efficiency within cabinet and exclusively at top of unit to maximize Cold Space™ and optimize heat exchange ventilation.
- Automatic, stainless steel condensate control system.
- Finless, **Free&Clear™** Condenser Coil maximizes air-flow over the compressor, reduces energy consumption and is non-clogging.
- High quality EC motors providing streamlined airflow, quieter and yet robust

Cabinet:

- Exterior – durable textured black.
- Interior – NSF approved white aluminum liner with stainless steel floor.
- Insulation – cabinet and solid doors are foamed-in-place with eco-conscious, polyurethane insulation.

Doors:

- Self-Closing Swing Doors feature hold-open position, and spring-back protection.
- Heavy duty thread-in leveler legs.
- Space saving design- air ventilation exclusively from the front of the unit.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Heat Reflecting HABCO Insulated Safety Glass with black extruded frame.
- Lock is optional/add on.

Lighting:



- Energy Efficient LED Lighting System for crisp Illuminated Interior Display, on Switch.

Storage:

- Ten (10) white PU coated shelves 21.25"W X 20.5"D (540mm X 521mm), are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments.

Electrical:

- Special Installation requirements for outdoor and/or Petroleum Station installations will increase cabinet dimensions noted. Install in Accordance to NFPA 70 and NFPA 30A employing a Certified Electrical Contractor. Contact HABCO for intended climate of use.

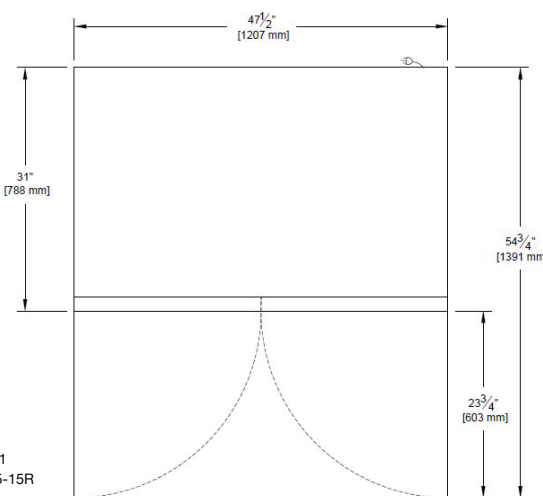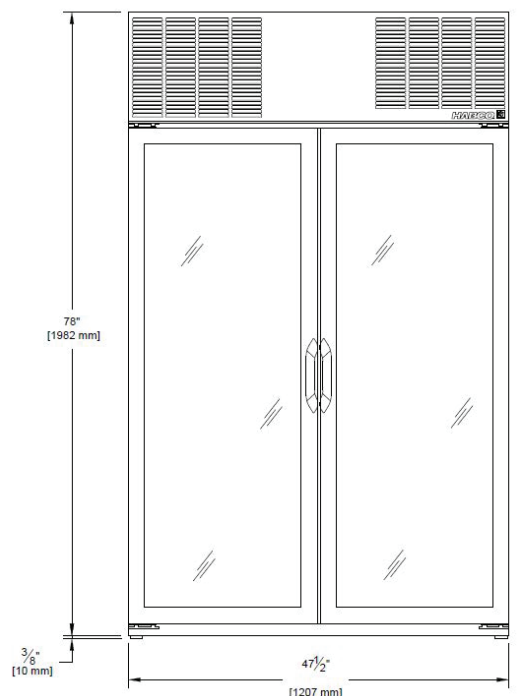

HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6
Toll Free CAN:1-800-387-5398 USA:1-800-448-0244 Fax:416-491-6982 www.habcomfg.com

©2017 HABCO Manufacturing Inc. HABCO is a registered trade mark of HABCO Manufacturing Inc. in Canada, USA, U.K. and Germany. HABCO logo design, Built to Perform. Crafted to Last. and CASSETTE are registered trademark of HABCO Manufacturing Inc. in Canada and U.S.A. Additional trade marks may be employed by HABCO and have been duly noted with respective registration mark or trade mark symbol.
DOMESTIC AND INTERNATIONAL PATENTS.