



BUILT TO PERFORM. CRAFTED TO LAST.®

# ESM28HC

BLACK XT/IN

Cold Space Merchandiser™



## Specifications

# Specifications

Width*	Depth**	Height***	Shelves	Interior Cubic Volume	Ship Weight	Ship Cube	Cooling Capacity	Electrical
30 1/2" 775 mm	31" 788 mm	78" 1982 mm	5	23.21 ft³	348 lbs 158 kg	49 cu. ft 1.39 m³	1/3 HP	115V/4.5 Amp/60 Hz - Single Phase NEMA 5-15P, Dedicated circuit
Flat Shelf 20oz/600ml				Gravity GlideSet™ 20 oz /600ml			Trailerload Quantity (53')	
315 (Packout) regular Shelves 360 (Packout) Extra Deep shelves			9 (Facings)	280 (Packout)	8 (Facings)	57		

\*\* Add 1" (26mm) for Power Cord. \*\*\* Add 3/8" (10mm) for Threaded-In Levelers. Millimeters rounded up.

## Premium Features



Automatic Stainless Steel  
Condensate Control System



Cassette®  
Refrigeration



Free & Clear  
Condenser Coil



HABCO  
Insulated Glass



Priority AirFlow



LED



Front Breathing  
Refrigeration

COLD SPACE MERCHANDISER

Specifications subject to change without notice. Refer to website for most current information.

### ESM28HC: Designed to optimize merchandising experience to the highest standards of quality and performance.

#### Refrigeration:

- Self-contained Cassette® forced-air refrigeration employs R290 hydrocarbon Natural Refrigerant within a sealed capillary tube system.
- Cassette® refrigeration is bottom-mounted and removable from the front for ease of maintenance. Refrigeration may be exchanged or upgraded without mechanic. Designed to hold 33°F to 38°F (0.5°C to 3.3°C).
- Priority, directed air flow provides optimum cooling and energy efficiency within cabinet and exclusively at front of unit for optimized heat exchange ventilation.
- Finless, **Free&Clear™** Condenser Coil maximizes air-flow over the compressor, reduces energy consumption and is non-clogging.
- Automatic, stainless steel condensate control system.
- Quality, self-lubricating and sealed motors with streamlined air-flow provide quieter yet robust refrigeration.
- Peak performance with quality EC motors designed for energy savings and superior performance.

#### Cabinet:

- Exterior – durable textured black.
- Interior – NSF approved black aluminum liner with stainless steel floor.
- Ergonomic raised interior floor.
- Space Saving Design – air ventilation exclusively from the front of unit.
- Insulation – cabinet is foamed-in-place with eco-conscious, polyurethane insulation.
- Heavy duty thread-in leveler legs.

#### Doors:

- Self-Closing Swing Door features hold-open position and spring-back protection, reversible on-location.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Heat Reflecting HABCO Insulated Safety Glass with black extruded frame.
- Integrated, injection molded pocket handle(s).

#### Lighting:



- Energy Efficient LED Lighting System for crisp Illuminated Signage and Interior Display, on Switch.

#### Storage:

- Five (5) black coated shelves 26 1/4"W x 22"D (667mm x 559mm), are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments.
- NSF-7 compliant for storage or display of pre-packaged aseptic product.

#### Electrical:

- Factory power cord installed for connection to a sole-use (dedicated) 115V/60Hz/1-Phase, 15 Amp circuit.

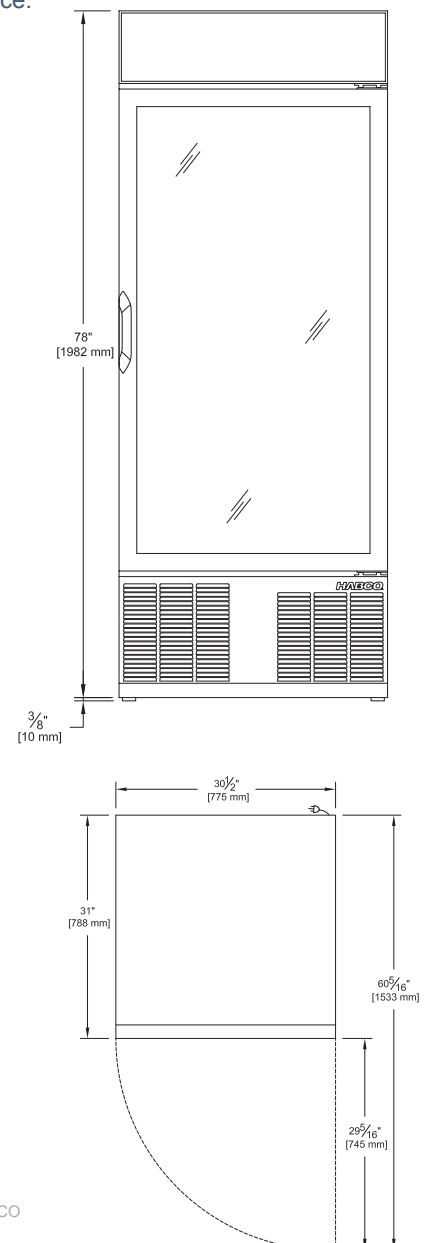

HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6  
Toll Free CAN:1-800-387-5398 USA:1-800-448-0244 Fax:416-491-6982 [www.habcomfg.com](http://www.habcomfg.com)

©2017 HABCO Manufacturing Inc. HABCO is a registered trade mark of HABCO Manufacturing Inc. in Canada, USA, U.K. and Germany. HABCO logo design, Built to Perform. Crafted to Last. and CASSETTE are registered trademark of HABCO Manufacturing Inc. in Canada and U.S.A. Additional trade marks may be employed by HABCO and have been duly noted with respective registration mark or trade mark symbol.  
DOMESTIC AND INTERNATIONAL PATENTS.