

H46HCP

Cold Space Merchandiser™



Specifications

Width*	Depth**	Height***	Shelves	Interior Cubic Volume	Ship Weight	Ship Cube	Cooling Capacity	Electrical
47.5" 1207 mm	31" 788 mm	78" 1982 mm	10	38.6 ft³	500 lbs 227 kg	80 cu.ft 2.28 m3	1/4 HP	115V/4.3A/60Hz - Single Phase - Install in Accordance to NFPA 70 and NFPA 30A
Flat Shelf Volume 20oz/600ml			Gravity GlideSet™ Volume 20 oz /600ml			Trailerload Quantity (53')		
490 (Packout)		14 (Facings)		490 (Packout)		14 (Facings)		36

** Add 1" (26mm) for Power Cord. *** Add 3/8" (10mm) for Threaded-In Levelers. Millimeters rounded up.

Premium Features



Automatic Stainless Steel Condensate Control System



Cassette® Refrigeration




Free & Clear Condenser Coil



HABCO Insulated Glass



Priority AirFlow



LED



Digitally Controlled

H46HCP: Designed to enhance outdoor refrigerated merchandising and display at Motor Fuel Installations, in accordance to NFPA 70 and NFPA 30A regulations.

Refrigeration:

- Self contained Cassette® forced-air refrigeration employs R-290 refrigerant within a sealed capillary tube system.
- Cassette® refrigeration is top-mounted and removable from the front for ease of maintenance. Refrigeration may be exchanged or upgraded without mechanic. Designed to hold 33°F to 38°F (0.5°C to 3.3°C) in higher ambient outdoor conditions.
- Priority, directed air flow provides optimum cooling and energy efficiency within cabinet and exclusively at top of unit to maximize Cold Space™ and optimize heat exchange ventilation.
- Automatic, stainless steel condensate control system.
- Finless, **Free&Clear™** Condenser Coil maximizes air-flow over the compressor, reduces energy consumption and is non-clogging.
- High quality EC motors providing streamlined airflow, quieter and yet robust

Cabinet:

- Exterior – durable textured black.
- Interior – NSF approved white aluminum liner with stainless steel floor.
- Insulation – cabinet and solid doors are foamed-in-place with eco-conscious, polyurethane insulation.

Doors:

- Self-Closing Swing Doors feature hold-open position, and spring-back protection.
- Heavy duty thread-in leveler legs.
- Space saving design- air ventilation exclusively from the front of the unit.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Heat Reflecting HABCO Insulated Safety Glass with black extruded frame.
- Lock is optional/add on.

Lighting:



- Energy Efficient LED Lighting System for crisp illuminated Interior Display, on Switch.

Storage:

- Ten (10) white PU coated shelves 21.25"W X 20.5"D (540mm X 521mm), are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments.

Electrical:

- Special Installation requirements for outdoor and/or Petroleum Station installations will increase cabinet dimensions noted. Install in Accordance to NFPA 70 and NFPA 30A employing a Certified Electrical Contractor. Contact HABCO for intended climate of use.

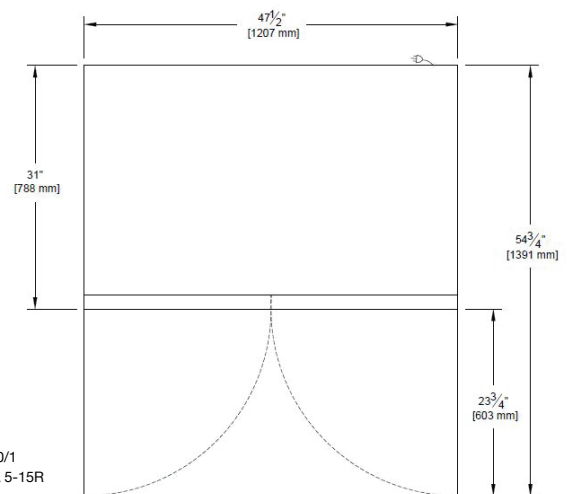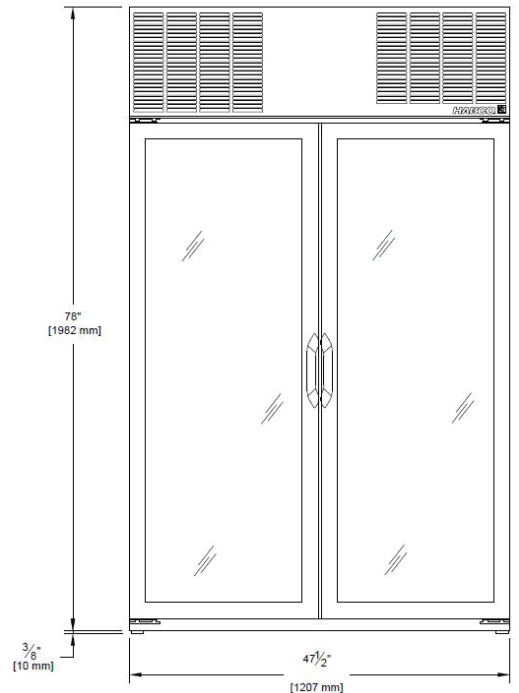

				<p>This equipment is intended for the storage and display of non-time/temperature control for safety foods bottled or canned products only.</p>
--	--	--	--	---

HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6
Toll Free CAN:1-800-387-5398 USA:1-800-448-0244 Fax:416-491-6982 www.habcomfg.com